

# Base IMIS Deployment Manual (Windows Environment)

- [Basic Requirements](#)
- [Tools Installation](#)
- [Web Application Setup](#)
- [Database Setup](#)
- [Setup GeoServer](#)
- [Add New Layers](#)
- [Start IMIS Application](#)

# Basic Requirements

The deployment manual is based on the specific system requirements mentioned below and any deviations will require adjustments to the deployment process. The specific system requirements mentioned below are recommended to ensure a smooth and error-free deployment process.

## 1.1 Prerequisites

The tools mentioned below need to be installed in the system for IMIS deployment. The Installation guide is shown in **Section 2**.

- XAMPP
- Composer
- Node JS
- PostgreSQL
- PostGIS
- GeoServer

## 1.2 Deployment Engineer Requirements

The recommended skillset for the deployment engineer conducting the deployment of IMIS is mentioned below. These skillsets are critical to ensure smooth and error free deployment and maintenance of IMIS.

- PostgreSQL
- PostGIS extension of PostgreSQL
- GeoServer

Apart from the deployment engineer, the minimum recommended skillset for the development/maintenance team is mentioned below:

- PHP language
- Laravel Framework
- PostgreSQL
- PostGIS extension of PostgreSQL
- NPM package manager
- Git version control
- GeoServer
- JavaScript
- jQuery
- Open Layers (OL)
- Technical Documentation



# Tools Installation

## 2.1 Localhost Server (WAMP Server) Installation

To set up a local server, download and install WAMPP from the official website. WAMP Server is recommended due to its ability to handle multiple PHP versions.

IMIS requires PHP version 8 or higher, as this version is essential for compatibility. Any version changes will require modifications to the deployment process and source code.

Once WAMPP is installed, launch the Apache server, and check the PHP version by navigating to <http://localhost/dashboard/phpinfo.php>. Ensure the PHP version is at least 8; if not, update WAMP Server or manually configure PHP to use version 8 executable if available. Additionally, ensure that the following extensions are installed:

- ext-zip
- pdo\_pgsql
- pgsql

## 2.2 Composer Installation

Composer is essential for managing dependencies in Laravel applications. Download and install Composer (V 2.2.7) globally from the <https://getcomposer.org/>, enabling system-wide access.

To confirm successful installation, open the command prompt and run:

```
Composer -v
```

This command verifies that Composer is installed correctly and ready for managing Laravel dependencies.

## 2.3 Database Installation

IMIS is designed and developed with PostgreSQL (V 14) database. For GIS data storage and processing, the PostGIS extension (V3) is used.

### 2.3.1 PostgreSQL Download and Installation

Download PostgreSQL (V14) from the official website

<https://www.postgresql.org/download/>

During installation, use default port 5432, or adjust it if needed to avoid conflicts.

Be sure to select essential tools like pgAdmin, which provides an intuitive interface for database management, query execution, and PostgreSQL configuration—making setup and ongoing management easier.

## 2.4 PostGIS Extension

PostGIS is required within PostgreSQL to enable GIS (Geographic Information System) data management for IMIS.

### 2.4.1 Enable PostGIS Extension

To install PostGIS,

Locate Your PostgreSQL Installation:

- Open File Explorer.
- Navigate to C:\Program Files\PostgreSQL.
- Identify the version of PostgreSQL you have installed (e.g., C:\Program Files\PostgreSQL\14).

Open Stack Builder:

- Inside the PostgreSQL installation folder, go to the bin subdirectory (C:\Program Files\PostgreSQL\14\bin).
- Run the StackBuilder.exe application.
- In Stack Builder, select your PostgreSQL version, then locate "Spatial Extensions" and choose PostGIS.

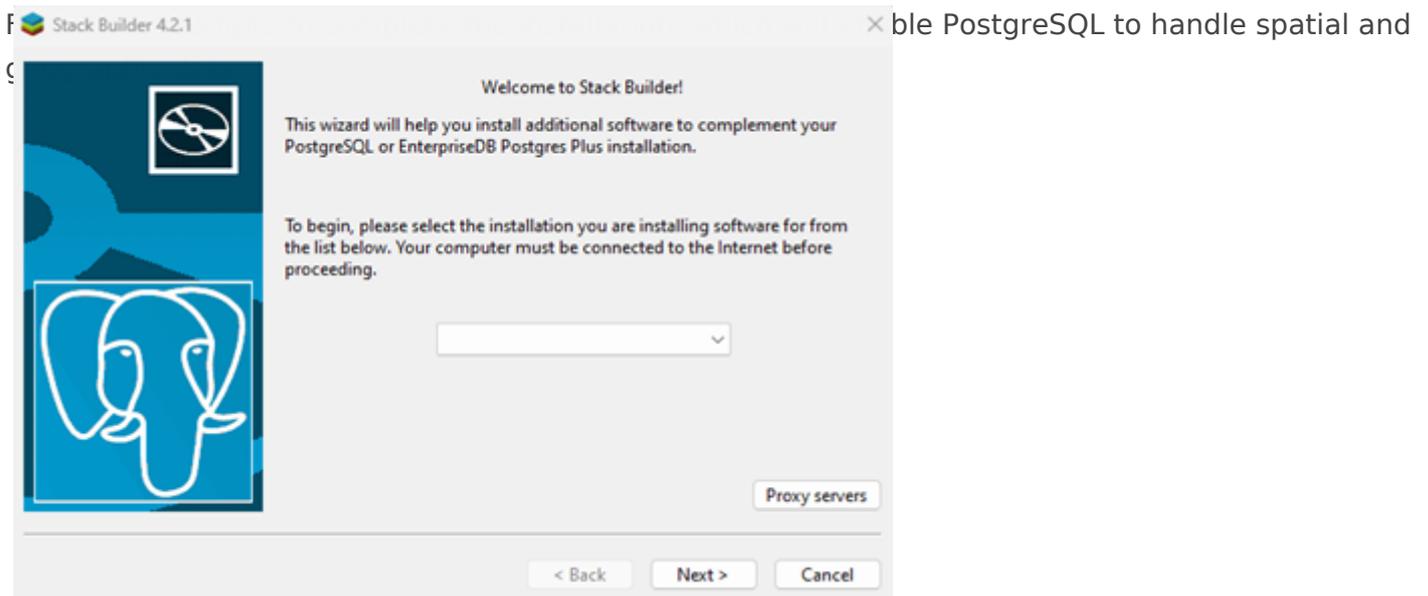


Figure 1 Stack Builder

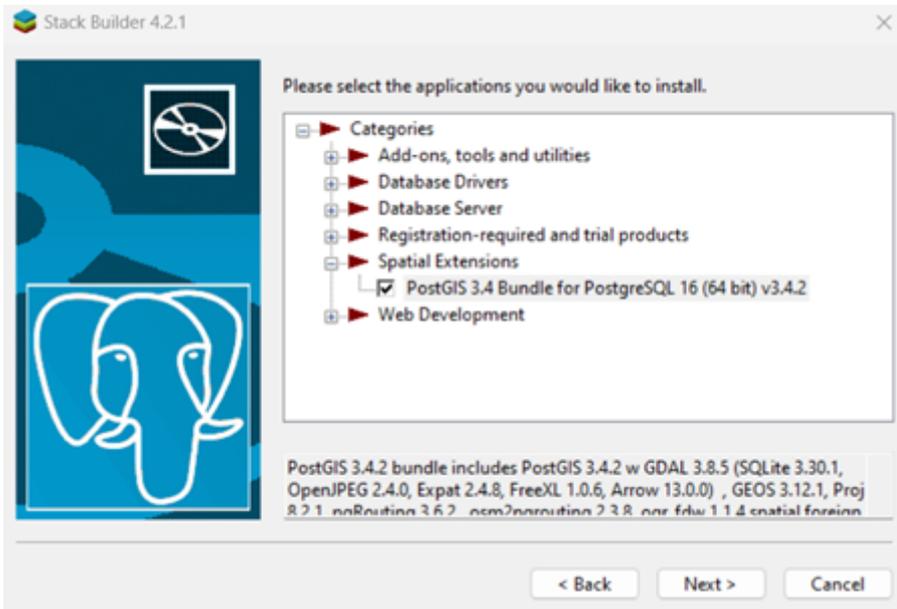


Figure 2 Select PostGIS extensions

## 2.5 GeoServer Installation

IMIS currently uses Geoserver (V2.21.0) for rendering and displaying spatial data maintained in the system. This specific version of Geoserver is recommended to ensure bugs/issues do not arise in the system.

### 2.5.1 GeoServer Download

Downloading V2.21.0 from the Geo Server page on Source Forge.

<https://sourceforge.net/projects/geoserver/files/GeoServer/2.21.0/GeoServer-2.21.0-winsetup.exe/download>

Geo Server requires a Java Development Kit (JDK) version 11.

Download the appropriate JDK installer for your operating system from the Oracle JDK website or from:

<https://adoptium.net/en-GB/temurin/releases/?os=windows&version=11&package=jdk>

Then install it in the Java folder within Program Files. Once the JDK is installed, configure it in your system's environment variables so that applications can recognize Java.

[Note: Remember the username and password during installation process.]• Open System Properties > Environment Variables

- Under System Variables, locate the Path variable, click Edit, and add the path to the JDK's bin directory (e.g., C:\Program Files\Java\jdk-11\bin).
- Click OK to save the changes.
- Once the JDK is configured, run the Geo Server installer and follow the prompts to complete the installation.
- Make sure to browse the JDK path, while adding just add JDK path not the bin path.

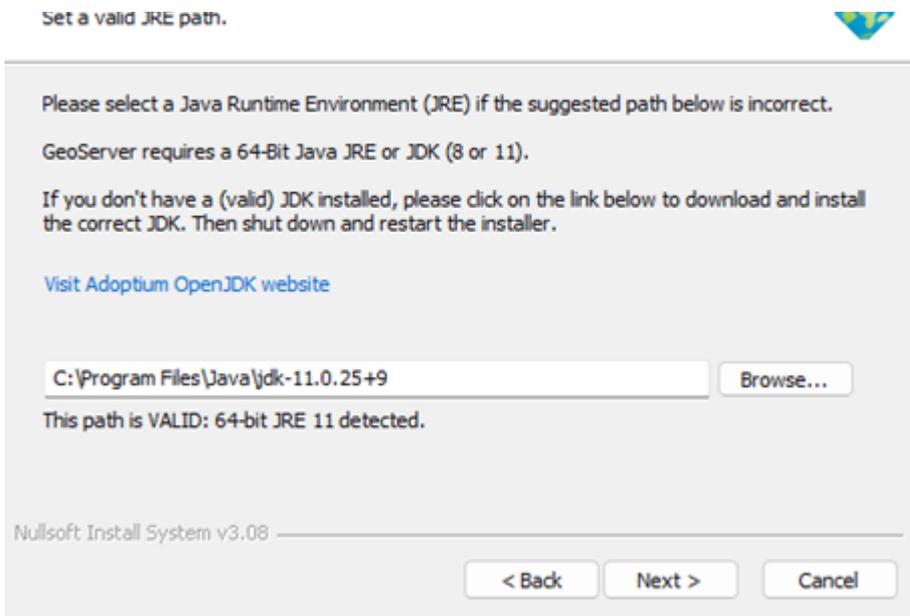


Figure 3 Installation of geo server(Browse the path to JDK)

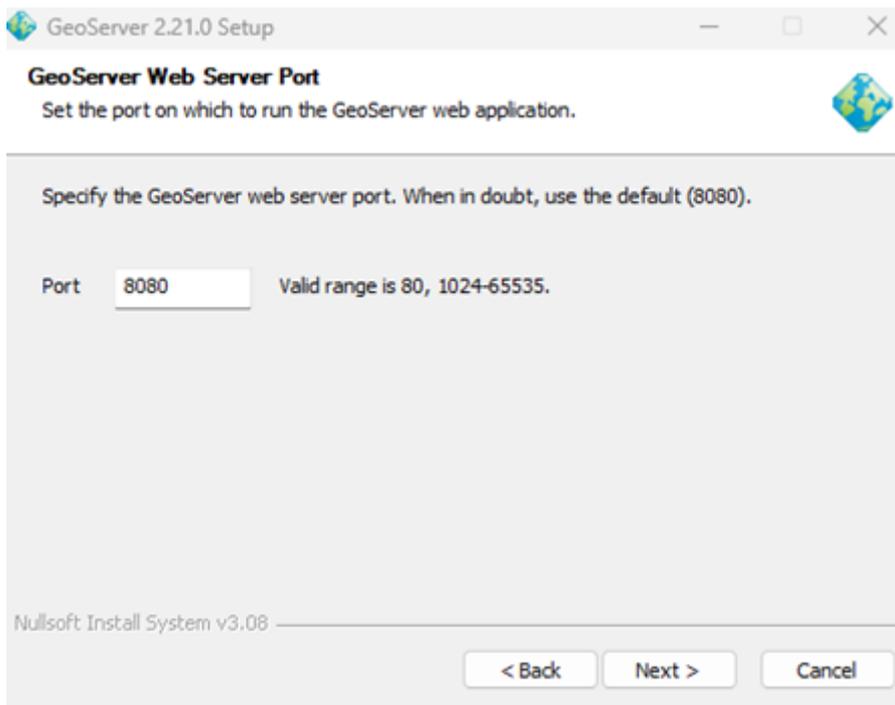


Figure 4 Add port 8080

## 2.5.2 Install Plugins for Geo Server

To enhance GeoServer functionality, certain plugins are essential.

### a) CSS Plugin

Download the CSS Plugin using the following link:

<https://sourceforge.net/projects/geoserver/files/GeoServer/2.21.0/extensions/geoserver-2.21.0-css-plugin.zip/download>

b) Query Plugin

Download the Query Plugin using following link

<https://sourceforge.net/projects/geoserver/files/GeoServer/2.21.0/extensions/geoserver-2.21.0-querylayer-plugin.zip/download>

c) Printing Plugin

Download the Printing Plugin using following link

<https://sourceforge.net/projects/geoserver/files/GeoServer/2.21.0/extensions/geoserver-2.21.0-printing-plugin.zip/download>

d) Copying the Plugins

Once downloaded, unzip the files and copy all the files with jar extension and place it in following path:

C:\Program Files\GeoServer\webapps\geoserver\WEB-INF\lib

Once successfully added the plugins restart the GeoServer.

# Web Application Setup

The following steps are recommended to be carried out to ensure set up of IMIS web application in windows environment.

## 3.1 Clone the IMIS project from GitHub

To initiate the deployment of IMIS on a local Windows environment, start by cloning the project files directly from GitHub.

Navigate to C:\xampp\htdocs in File Explorer; this directory serves as the default web root for XAMPP.

Open a command prompt or terminal with administrative privileges, switch to the htdocs directory, and execute the following Git command to clone the IMIS repository:`git clone <github_repo_link>`

This command copies all files from the remote repository to your local htdocs folder, making the IMIS codebase available for further setup steps. After cloning, you'll see a new folder with the repository name in htdocs.

### 3.1.1 Folder Setup

Two folders need to be created manually to store building survey KML files sent via mobile application and the emptying receipts and house images as well. They can be done by following steps:

- Navigate to `storage/app/public`
- Make new folder and name it "building-survey-kml"
- Make another folder and name it "emptyings"
- Inside "emptyings" folder make two folders and name them "houses" and "receipts"

## 3.2 Install Dependencies

Launch a command prompt or terminal and use the `cd` command to navigate to the IMIS project directory within htdocs (commonly located at C:\xampp\htdocs\imis-revamp2.0). Once the terminal is set to the project root, run the following command:

```
composer install --ignore-platform-reqs
```

This command uses Composer to download and install all required PHP packages and libraries listed in the composer.json file. These libraries are essential for Laravel and IMIS to function properly.

### 3.2.1 Install JavaScript Dependencies

Install node v20.17.0

<https://nodejs.org/en/download/prebuilt-installer>

Execute the following commands to install and compile frontend dependencies:

```
npm install && npm run dev
```

The npm install command will download all required JavaScript dependencies, while npm run dev compiles assets, such as CSS and JavaScript files, for development. This step is essential for building the frontend of the IMIS application, ensuring all stylesheets and scripts load properly.

### 3.2.2 Generate The Application Key

In the terminal, within the IMIS project directory, run the following command

```
php artisan key:generate
```

After running the command, you'll see an output message confirming that the application key was successfully generated. The .env file will now contain a line like

```
APP_KEY=base64:yourGeneratedKeyHere
```

# Database Setup

## 4.1 Blank Database Import

A blank database of the IMIS is maintained in the GitHub organization under the repository `deployment_documentation`. This blank database is imported into PostgreSQL through pgAdmin. The database server (PostgreSQL) must be connected through pgAdmin initially: For the steps refer to Section `Connect to db through pgadmin`.

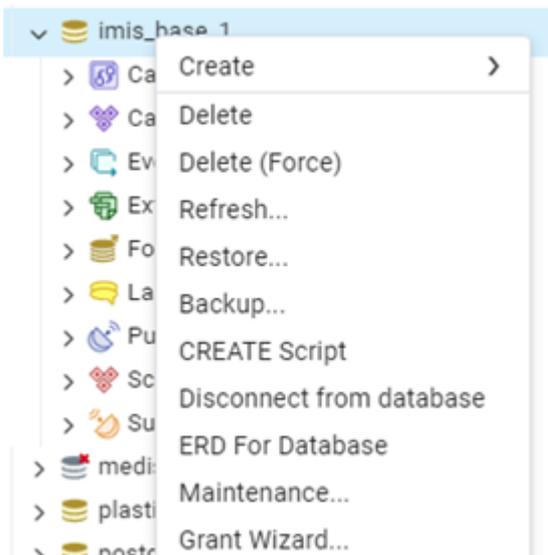


Figure 5 Select Restore and choose the provided database to restore

- Step 1 : Download the blank database from the GitHub repository.
- Step 2 : Open pgAdmin and connect to your PostgreSQL server.
- Step 3 : Navigate to your server's "Databases" folder.
- Step 4 : Right-click on the target database where you want to import the schema and data, and then select "Restore..." from the context menu.
- Step 5 : Under the "Format" section, choose "Custom or Tar" from the dropdown menu. This format allows you to import both schema and data together. Browse the file by clicking on the "..." button in the "Filename" field.
- Step 6 : Select the correct format of the file you are restoring, dump or backup.
- Step 7 : Go to "Data Options" tab, under the "Do not save" section, check the box labeled "Owner".
- Step 8 : Click "Restore".
- Step 9 : If prompted, enter the password for the database superuser.
- Step 10 : Update the `.env` file in the web-application server with the corresponding values of the database, such as database name, credentials, etc.

The restoration process will start, and pgAdmin will import the schema and data into the target database. The time it takes to complete depends on the size of the database dump. Explore the

tables and other database objects to verify that the schema and data have been imported.

Note: When restoring a PostgreSQL database, permission issues could arise if the original owner specified in the backup does not exist on the target system. To overcome this issue, Exclude Ownership Restoration as mentioned in Error! Reference source not found.. This corresponds to the `--no-owner` flag, telling pgAdmin not to set ownership of the objects to the original user from the backup.

## 4.2 Configure Environment Variables (.env)

Configure the environment settings for the IMIS project, which define essential application and database connection parameters.

In the IMIS project directory, locate the `.env.example` file. Copy this file and rename the copy to `.env`. This file will hold environment-specific settings for your local IMIS deployment.

Open the `.env` file in a text editor and set the following configurations for the PostgreSQL database connection and set the appropriate paths for the different provided variables as well:

<code>DB_CONNECTION=pgsql</code>	<code># Sets PostgreSQL as the database driver</code>
<code>DB_HOST=127.0.0.1</code>	<code># Sets PostgreSQL as the database driver</code>
<code>DB_PORT=5433</code>	<code># Defines the port PostgreSQL is listening on (set to 5433 as configured earlier)</code>
<code>DB_DATABASE=imis_base</code>	<code># Replace 'imis_base' with your actual database name</code>
<code>DB_USERNAME=your_username</code>	<code># Replace with your PostgreSQL username</code>
<code>DB_PASSWORD=your_password</code>	<code># Replace with your PostgreSQL password</code>

## 4.3 Database Seeder

The default look-up values for various dropdowns and default roles, permissions and user access can be setup through the seeder. Run the database seeder command:

```
php artisan db:seed
```

## 4.4 Importing Data into IMIS

The blank database provided does not contain any data apart from the look up values updated through the seeder. The initial dataset obtained from the survey must be cleaned and processed into individual SQL dump files, that follows the naming standards and data types as mentioned in the data dictionary. The table names, field names and data types must exactly match the data

dictionary/ database.

#### 4.4.1 Data Importing Sequence

As the IMIS is developed based on a relational database, the import sequence of the datasets must be followed strictly to ensure that there are no issues during the importing process. The import sequence is provided below:


S.N.	Schema Name	Table Name	Type
1	layer_info	citypolys	spatial
2	layer_info	landuses	spatial
3	layer_info	waterbodys	spatial
4	layer_info	wardboundary	spatial
5	layer_info	grids	spatial
6	layer_info	wards	spatial
7	layer_info	ward_overlay	spatial
8	layer_info	sanitation_system	spatial
9	utility_info	roads	spatial
10	utility_info	water_supplys	spatial
11	fsm	treatment_plants	spatial
12	utility_info	sewers	spatial
13	utility_info	drains	spatial
14	layer_info	places	spatial
15	layer_info	low_income_communities	spatial
16	building_info	buildings	Spatial
17	fsm	containments	Spatial
18	building_info	build_contains	Non-Spatial
19	building_info	owners	Non-Spatial
20	fsm	toilets	Spatial
21	fsm	build_toilets	Non-Spatial

#### 4.4.2 Importing Spatial Data


To import any table, follow the data dictionary and prepare data layers in QGIS with proper column name then import data into PostgreSQL database.

Step 1 : Data Preparation: Create PostgreSQL SQL Dump file (repeat the same process for all the spatial data), ensure the table name, field names and data formats matches exactly with the data dictionary/database.

- a. Select the 'Spatial data Layer' with all the required attributes (following the data dictionary)
- b. Right click and go to 'Export' option and select 'Save Feature As...'

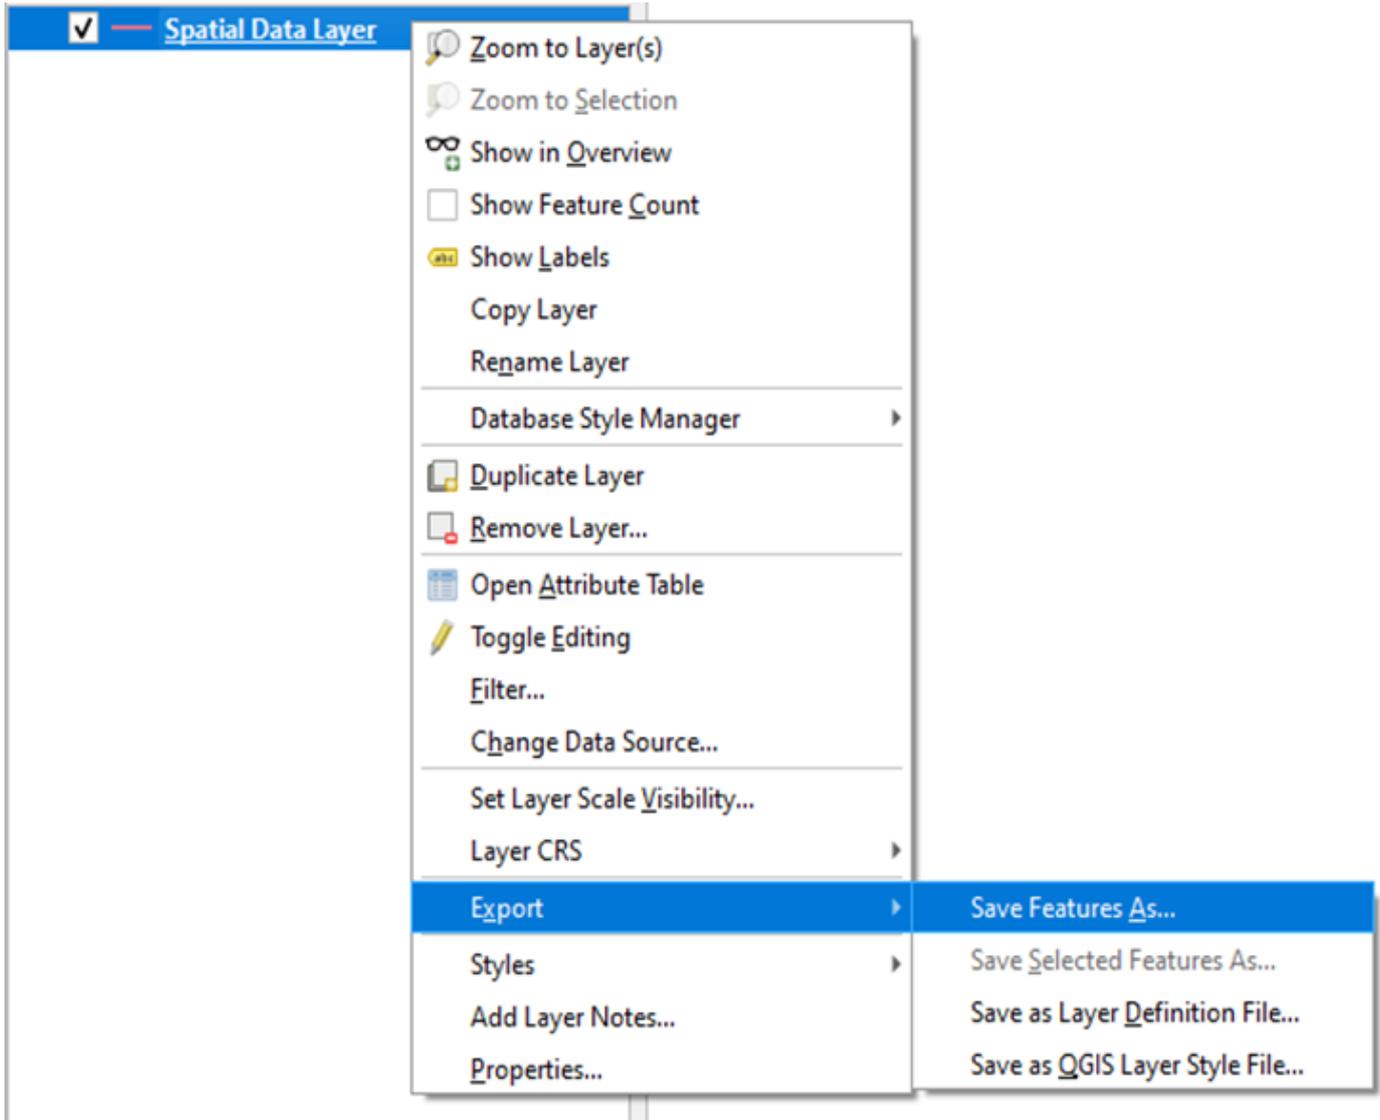


Step 2 : Select the format: 'PostgreSQL SQL Dump'

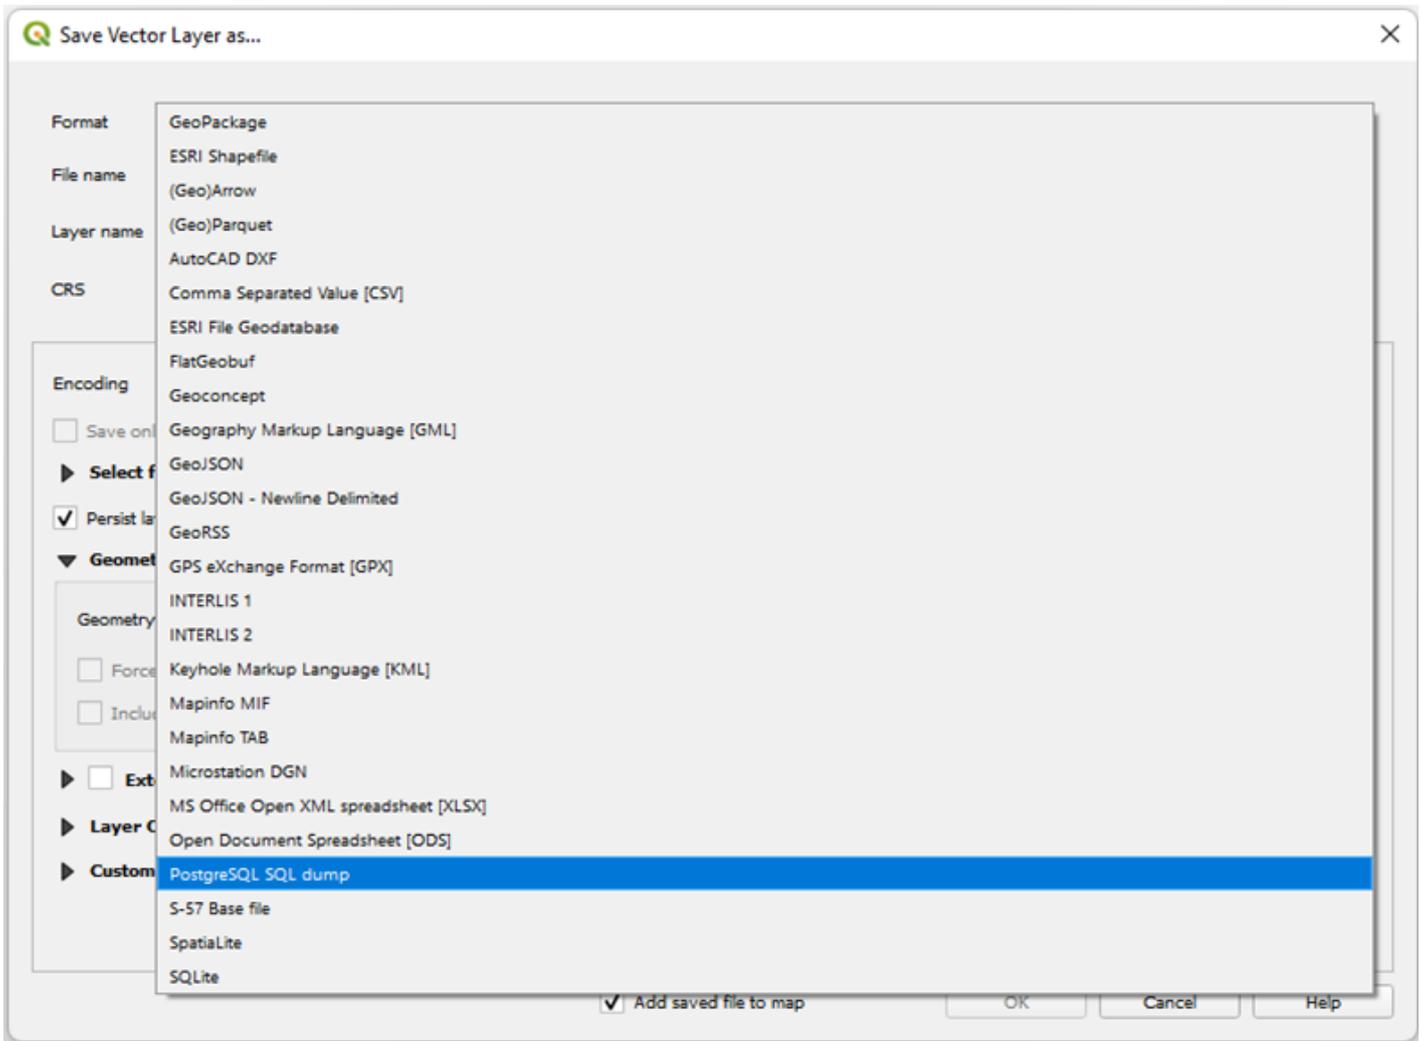


a. Select File Location and Give filename same as Table Name.

Example: for table roads:

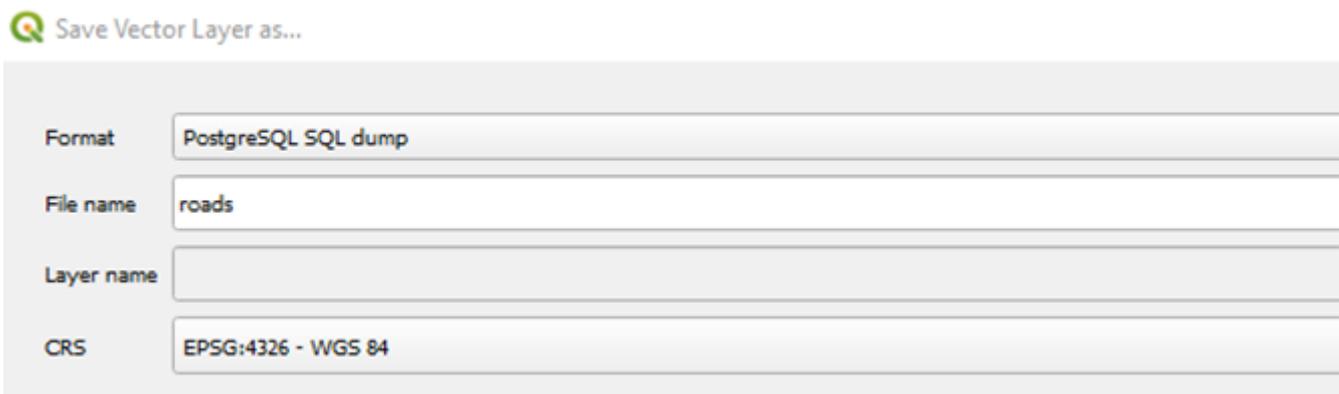


b. In Layer Options:

- i. CREATE\_SCHEMA: NO
- ii. CREATE\_TABLE: NO
- iii. DROP\_TABLE: NO
- iv. GEOMETRY\_TYPE: GEOM
- v. SCHEMA: SCHEMA\_NAME
- vi. SRID: 4326

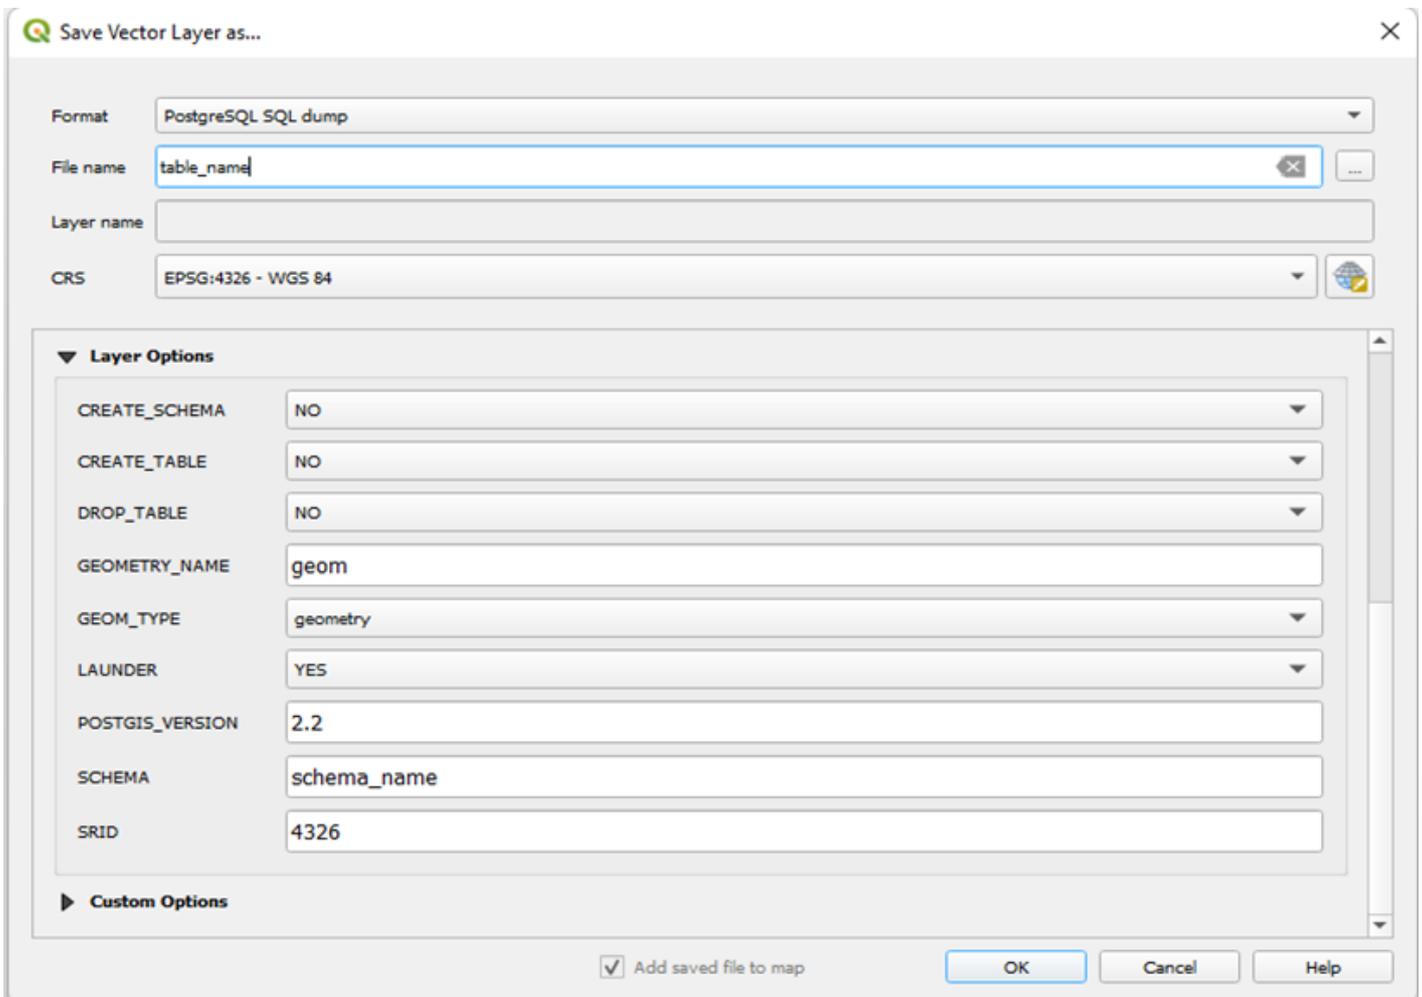

c. In Layer Options: For Table 'roads'

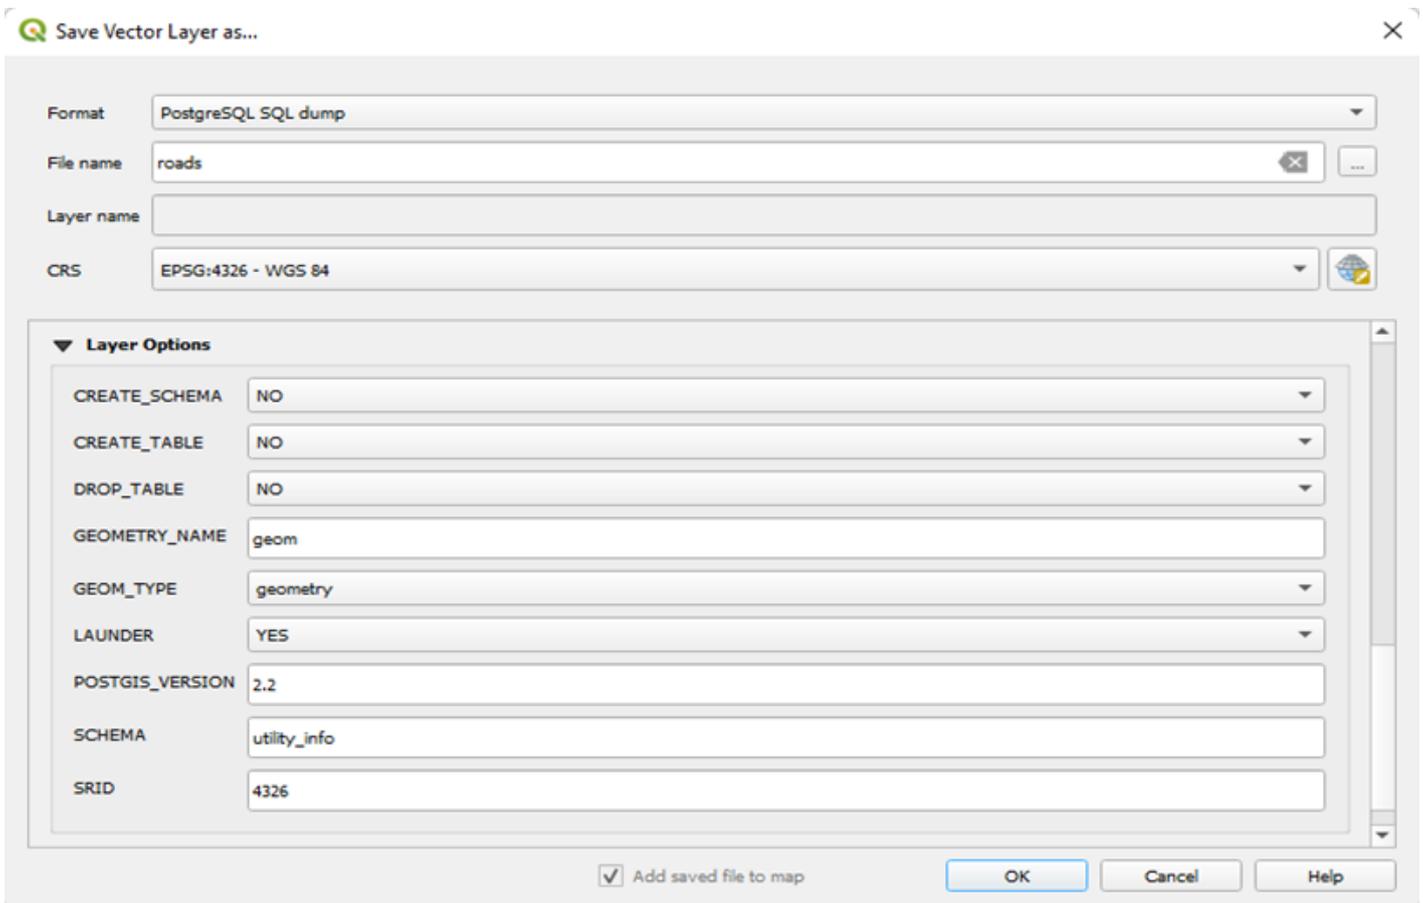

Step 3 : Import into database via Pg-Admin.

- a. Open Pg-Admin.
- b. Open/Connect to Database
- c. Right click and open the Query Tool.
- d. Click on 'Open file' icon and select the exported SQL Dump File.
- e. Click on 'Run' Button and execute the commands.
- f. Check if all the data has been imported or not.

#### 4.4.3 Importing Non-Spatial / CSV Data

Step 1 : Launch pgAdmin and connect to your PostgreSQL database server.

Step 2 : Right-click on the table where you want to import the CSV data.

Step 3 : Select 'Import Data' from the right-click menu.

Step 4 : In Filename option, navigate to your CSV file's location and select the file.

Step 5 : Choose CSV from the format options.

Step 6 : If the CSV file has column headers in the first row, check the Header box.

Step 7 : Click OK to start the import process.

#### 4.5 Build and Triggers Functions Setup

Functions and Triggers are used in IMIS to automate and streamline database operations that perform specific tasks within the database, such as updating counts in real-time, supporting map tools, and import modules. Triggers are used in IMIS to automatically execute predefined actions in the database, such as updating counts maintaining data consistency, whenever data insertions occur, without manual intervention. This setup improves overall performance by executing

predefined actions efficiently, making the system responsive.

Run the following commands to build all the necessary functions and triggers required for the system to function correctly:

Creates Functions and triggers to update count for grids & wards and summary chart

```
php artisan buildfunction:updatecount
```

Creates or replace (Or Delete and create) maptool queries if not exists functions

```
php artisan buildfunction:maptool
```

Creates Functions to create table when new data is imported for tax payment, watersupply and swmpayment:

```
php artisan buildfunction:taxphp artisan buildfunction:watersupply  
php artisan buildfunction:swmpayment
```

Create quarters data for FSM KPI dashboards.

```
php artisan kpi:cron
```

When importing data in bulk or during the initial setup, it's recommended to disable the trigger, update the count manually, and then re-enable the trigger to ensure accurate data processing without unnecessary overhead during the import process.

#### 4.6 Summary Data Count Update

During the initial setup or after importing data, you need to update the count in the summary tables manually, but once the system is up and running, a trigger will automatically update the count each time new data is added.

To update grids & wards count when buildings have changes

```
php artisan updatecount:buildings
```

To update grids & wards count when fsm.containments has changes

php artisan updatecount:containments

To update grids & wards count when utility\_info.roads has changes

php artisan updatecount:roadlines


To update grids & wards count when fsm.applications has changes

php artisan updatecount:applications

# Setup GeoServer

GeoServer includes several styles designed for IMIS. To set up these styles in IMIS, create a workspace and corresponding datastore connecting to the IMIS Database after installing GeoServer. The corresponding information related to the names and other attribute information related to the workspace, stores, layer and styles information including CSS, SLDs, and SQL queries are included and regularly maintained in the technical document section with the filename `geoserver\_document.md` within the documentation sub-directory in the GitHub repository named web-app source code. To create a new workspace, store, layer, and styles in a geoserver, follow the steps as mentioned in Section Creating New Workspace, Store, Layer & Style in Geoserver. Each workspace, store, layer and style must be created to ensure the proper functioning of the map interface. Currently, there is one workspace, nine stores, thirty layers and one hundred and seventeen styles. Each of these must be created as per the geoserver\_document.md values in the newly set up geoserver. Alternatively, the present workspace is also provided in the GitHub repository under the deployment\_documentation in the sub-directory geoserver\_workspace\_setup, which can also be imported into the geoserver through minor modifications to the XML file that is mentioned below.

To launch GeoServer, start the GeoServer service and navigate to <http://localhost:8080/geoserver> in your web browser. This URL directs you to the GeoServer homepage. Log in using the username and password configured during the installation process.

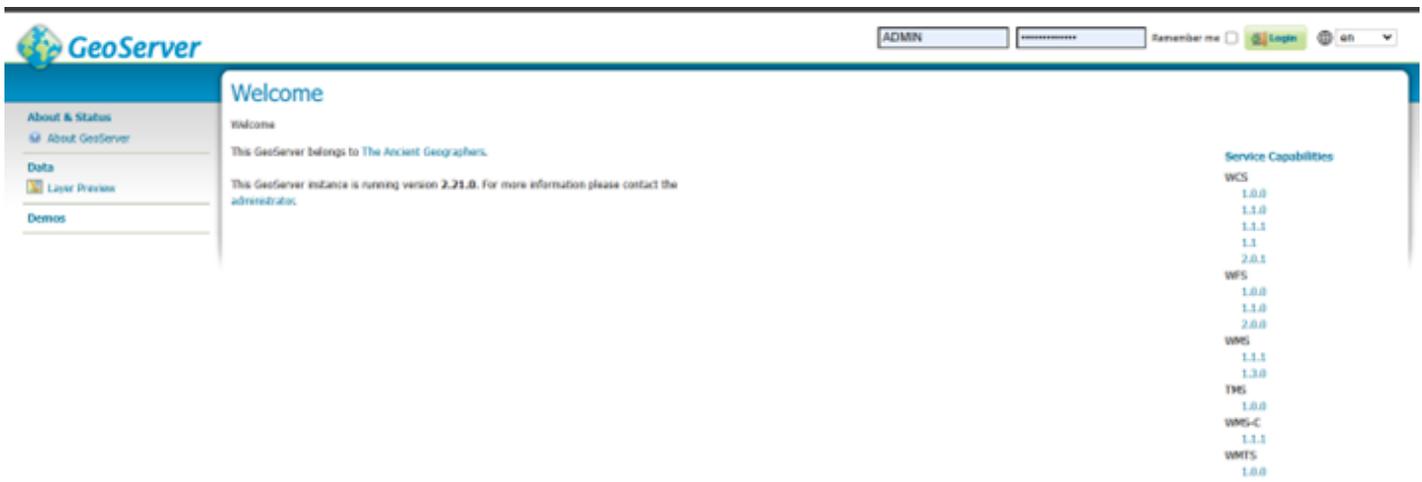

## 5.1 Add New Workspace

After logging into GeoServer, create a new workspace by navigating to the **Workspace** in the left-side menu and selecting **Add new workspace**.

**About & Status**

- Server Status
- GeoServer Logs
- Contact Information
- About GeoServer

**Data**

- Layer Preview
- Workspaces
- Stores
- Layers
- Layer Groups
- Styles

**Services**

- WMTS
- WCS
- WFS
- WMS

**Settings**

- Global
- Image Processing
- Raster Access

## Workspaces

Manage GeoServer workspaces

 Add new workspace  Remove selected workspace(s)

<< < 1 > >> Results 1 to 8 (out of 8 items)

<input type="checkbox"/>	Workspace Name
<input type="checkbox"/>	cite
<input type="checkbox"/>	imis_base
<input type="checkbox"/>	it.geosolutions
<input type="checkbox"/>	nurc
<input type="checkbox"/>	sde
<input type="checkbox"/>	sf
<input type="checkbox"/>	tiger
<input type="checkbox"/>	topp

<< < 1 > >> Results 1 to 8 (out of 8 items)

Add a new workspace, for the workspace add the name of the current database that we are working on. For NameSpace URI add the URI that we are currently working on. In our local deployment Namespace URI may be localhost:8000

**About & Status**

-  Server Status
-  GeoServer Logs
-  Contact Information
-  About GeoServer

---

**Data**

-  Layer Preview
-  Workspaces
-  Stores
-  Layers
-  Layer Groups
-  Styles

---

**Services**

-  WMTS
-  WCS
-  WFS
-  WMS

---

**Settings**

## New Workspace

Configure a new workspace

Basic Info

Security

Name

Namespace URI

The namespace uri associated with this workspace

Default Workspace

Isolated Workspace

## 5.2 Add New Store

To add a new store in GeoServer, follow the steps mentioned below

- On the left sidebar, select Stores.
- This will open the main Stores page where existing stores are listed.
- On the Stores page, look for the Add New Store link or button.
- Click Add New Store to open the form for entering the details of the new store.

## Stores

Manage the stores providing data to GeoServer

 [Add new Store](#)  Remove selected Stores

<<
<
1
2
3
>
>>
Results 1 to 25 (out of 58 items)
Search

	Data Type	Workspace	Store Name	Type	Enabled?
<input type="checkbox"/>		nurc	arcGridSample	ArcGrid	✓
<input type="checkbox"/>		nurc	img_sample2	WorldImage	✓
<input type="checkbox"/>		imis_africa	imis_africa_building_info	PostGIS	✓
<input type="checkbox"/>		imis_africa	imis_atrica_layer_info	PostGIS	✓

It will take you to new data source page where we are working with POSTGIS so we will select that:

## New data source

Choose the type of data source you wish to configure

### Vector Data Sources

-  Directory of spatial files (shapefiles) - Takes a directory of shapefiles and exposes it as a data store
-  GeoPackage - GeoPackage
-  PostGIS - PostGIS Database
-  PostGIS (JNDI) - PostGIS Database (JNDI)
-  Properties - Allows access to Java Property files containing Feature information
-  Shapefile - ESRI(tm) Shapefiles (\*.shp)
-  Web Feature Server (NG) - Provides access to the Features published a Web Feature Service, and the ability to perform transactions on the server (when supported / allowed).

### Raster Data Sources

-  ArcGrid - ARC/INFO ASCII GRID Coverage Format
-  GeoPackage (mosaic) - GeoPackage mosaic plugin
-  GeoTIFF - Tagged Image File Format with Geographic information
-  ImageMosaic - Image mosaicking plugin
-  WorldImage - A raster file accompanied by a spatial data file

### Other Data Sources

-  WMS - Cascades a remote Web Map Service
-  WMTS - Cascades a remote Web Map Tile Service

After this will direct to the page where we will add details about new vector data source, On this page, you'll first encounter the Basic Store Info section.

## Basic Store Info

---

Workspace \*

iims\_base ▼

Data Source Name \*

Description

Enabled

Auto disable on connection failure

- On the Workspace, dropdown select workspace you have created.
- In Data Source Name you need to give the name as given in the GeoServer Documentation in Git Hub Organization.

[Note: While adding store for “layer\_info” make sure you tick “Expose Primary Key” option.]

After this on the connection parameters section:

## Connection Parameters

host \*  
localhost

port \*  
5432

database  
imis\_base

schema  
public

user \*  
postgres

passwd  
\*\*\*

Namespace \*  
http://192.168.1.79:8000

- On database label, put the database name which you are working on.
- On the schema put the schema name you are working on.
- For the user and password, you will put the credentials used for the pgAdmin.

Once finished, click on the apply and then save.

## 5.3 Add New Layers

To add a new layer in GeoServer, follow the steps below

- On the left sidebar, select Stores.
- This will open the main Layers page where existing Layers are listed.
- On the Layers page, look for the Add New Layer link or button.
- Click Add New Layer to open the form for entering the details of the new Layer.

### Layers

Manage the layers being published by GeoServer

[Add a new layer](#) [Remove selected layers](#)

<< < 1 2 3 4 5 > >> Results 1 to 25 (out of 182 items)

<input type="checkbox"/>	Type	Title	Name	Store	Enabled	Native SRS
<input type="checkbox"/>		buildings	imis_africa:buildings_layer	imis_africa_building_info	✓	EPSG:4326
<input type="checkbox"/>		citypolys	imis_africa:citypolys_layer	imis_atrica_layer_info	✓	EPSG:4326
<input type="checkbox"/>		containments	imis_africa:containments_layer	imis_base_fsm	✓	EPSG:4326

To add the new layer select the table you want to add layer to.

## New Layer

Add a new layer

Add layer from

You can create tribute names and types. [Create new feature type...](#)

On databases y g a native SQL statement. [Configure new SQL view...](#)

Here is a list of Choose One

Published	Name	Action
	ains	Publish
	surveys	Publish
		Publish
	_uses	Publish
		Publish
	_systems	Publish
	_types	Publish
	_ads	Publish
	use_categorys	Publish
	water_sources	Publish
	wms_links	Publish

Figure 6 Adding new layer

Once you have chosen the table you can either publish or Configure new SQL view, which you can see in the figure 5.

### 5.6 Resolving CORS Errors in GeoServer

If you encounter a CORS error in the web interface during deployment, follow these steps to resolve it, Locate the following path

C:\Program Files\GeoServer\webapps\geoserver\WEB-INF\web

Open web.xml as administrator, and uncomment the following section

<!-- Uncomment following filter to enable CORS in Jetty. Do not forget the second config block further down. -->

```
<filter>
  <filter-name>cross-origin</filter-name>
  <filter-class>org.eclipse.jetty.servlets.CrossOriginFilter</filter-class>
  <init-param>
    <param-name>chainPreflight</param-name>
    <param-value>>false</param-value>
  </init-param>
  <init-param>
    <param-name>allowedOrigins</param-name>
    <param-value>*</param-value>
```

```

</init-param>
<init-param>
  <param-name>allowedMethods</param-name>
  <param-value>GET,POST,PUT,DELETE,HEAD,OPTIONS</param-value>
</init-param>
<init-param>
  <param-name>allowedHeaders</param-name>
  <param-value>*</param-value>
</init-param>
</filter>

```

```

<!-- Uncomment following filter to enable CORS -->
<filter-mapping>
  <filter-name>cross-origin</filter-name>
  <url-pattern>/*</url-pattern>
</filter-mapping>

```

## 5.7 Importing New Workspace, Store, Layer & Style in Geoserver

To streamline the process of importing manually creating the individual workspaces, stores, layers and styles in geoserver, an alternative approach is to import the entire workspace into geoserver directly. The workspace is provided in the GitHub repository.

Download the zip file and follow the instructions provided below to import the existing workspace into geoserver:

Step 1 : After the geoserver has been installed, create a new workspace named "sample\_workspace" with URL 127.0.0.1.

Step 2 : Create a store named "sample\_datastore" with the following details:

- a. Select the PostGIS (PostGIS Database) option
- b. Set the the Workspace as "sample\_worspace"
- c. Set the Data Source Name as "imis\_base\_building\_info"
- d. Set the Host with the IP of the database that has been setup
- e. Set the port that has been used.
- f. Set the database name (base\_imis)
- g. Set the Schema as building\_info.
- h. Set the database username and password that has been used.
- i. Save the Store

Step 3 : Open to the file:

C:\ProgramData\GeoServer\workspaces\sample\_workspace\datastore.xml

Step 4 : Copy the following lines of code:

```
<entry key="passwd">crypt1:dummyCrypt</entry>
```

Step 5 : Download the provided zip file (Repository: Deployment\_Manual, Sub Directory: Geoserver Workspace Setup) and unzip to your local machine.

Step 6 : Navigate to the datastore.xml of each data store and replace the line of code with the

line of code copied in Step 4.

Step 7 : Ensure the following lines of code match the values as well:

```
<entry key="database">{{DATABASE_NAME}}</entry>
```

```
<entry key="host">localhost</entry>
```

```
<entry key="namespace">">127.0.0.1</entry>
```

Step 8 : Once each datastore's passwd key and other values have been updated, copy the entire workspace folder and paste it into the location: C:\ProgramData\GeoServer\workspaces\

Step 9 : Ensure that the folder name matches the workspace you are importing (base\_imis) and that the sub-folder within the folder contains the data stores.

Step 10 : Restart the tomcat service.

Step 11 : Check if the workspace, store, layer and style is present in the geoserver and remove the dummy workspace that was created.

# Add New Layers

## 5.3 Add New Layers

To add a new layer in GeoServer, follow the steps below

- On the left sidebar, select Stores.
- This will open the main Layers page where existing Layers are listed.
- On the Layers page, look for the Add New Layer link or button.
- Click Add New Layer to open the form for entering the details of the new Layer.

Type	Title	Name	Store	Enabled	Native SRS
<input type="checkbox"/>	buildings	imis_africa:buildings_layer	imis_africa_building_info	✓	EPSG:4326
<input type="checkbox"/>	citypolys	imis_africa:citypolys_layer	imis_atrica_layer_info	✓	EPSG:4326
<input type="checkbox"/>	containments	imis_africa:containments_layer	imis_base_fsm	✓	EPSG:4326

To add the new layer select the table you want to add layer to.

Add layer from: imis\_base:imis\_base\_building\_info

You can create a new layer by providing a name and type. [Create new feature type...](#)

On databases you can create a layer by providing a native SQL statement. [Configure new SQL view...](#)

Here is a list of tables to choose from:

Published	Name	Action
<input type="checkbox"/>	imis_base:imis_base_building_info	Publish
<input type="checkbox"/>	imis_base:imis_base_fsm	Publish
<input type="checkbox"/>	imis_base:imis_base_grey_water	Publish
<input type="checkbox"/>	imis_base:imis_base_layer_info	Publish
<input type="checkbox"/>	imis_base:imis_base_public_health	Publish
<input type="checkbox"/>	imis_base:imis_base_swm_payment_info	Publish
<input type="checkbox"/>	imis_base:imis_base_taxpayment_info	Publish
<input type="checkbox"/>	imis_base:imis_base_utility_info	Publish
<input type="checkbox"/>	imis_base:imis_base_waterpayment_info	Publish
<input type="checkbox"/>	imis_base:public	Publish
<input type="checkbox"/>	ne:NaturalEarth	Publish
<input type="checkbox"/>	nurc:arcGridSample	Publish
<input type="checkbox"/>	nurc:img_sample2	Publish
<input type="checkbox"/>	nurc:mosaic	Publish
<input type="checkbox"/>	use_categories	Publish
<input type="checkbox"/>	water_sources	Publish
<input type="checkbox"/>	wms_links	Publish

## Figure 6 Adding new layer

Once you have chosen the table you can either publish or Configure new SQL view, which you can see in the figure 5.

# Start IMIS Application

To start the IMIS application, launch the Laravel development server by running the following command in the terminal within the IMIS project directory:

```
php artisan serve
```

This command initiates the development server, allowing the IMIS application to run on your local machine. Once the server is running, open a web browser and navigate to <http://127.0.0.1:8000> (localhost) to access the IMIS application homepage.